

Efficient Pruning Methods for Separate-and-Conquer Rule Learning Systems

William W. Cohen

AT&T Bell Laboratories

600 Mountain Avenue Murray Hill, NJ 07974

wcohen@research.att.com

Abstract

Recent years have seen increased interest in systems that learn sets of rules. The goal of this paper is to study the degree to which “separate and conquer” rule learning induction methods scale up to large, real-world learning problems. In particular, we study the asymptotic complexity of rule induction on large training sets in the presence of noise. We present formal arguments and experimental data supporting the claim that existing methods do not scale up well on noisy data. We then present a solution in the form of new pruning techniques that dramatically improve the runtime of rule induction methods with no loss in accuracy: formal analysis shows an improvement in asymptotic time complexity, and experiments show an order-of-magnitude speedup on a set of benchmark problems while obtaining slightly more accurate hypotheses.

1 Introduction

Of number of systems exist that learn sets of if-then rules. Many rule learning systems generate hypotheses using a greedy strategy in which rules are added to the rule set one by one in an effort to form a small cover of the positive examples; each rule, in turn, is created by adding one condition after another to the antecedent until the rule is consistent with the negative data. This greedy approach to building rule sets has been termed *separate and conquer*, by analogy with the divide and conquer approach commonly used in top-down decision tree induction [Pagallo and Hassler, 1990].

Recent years have seen increased interest in rule learning systems in general, and separate-and-conquer rule learning systems in particular. One reason is that the rule sets have a natural and familiar first order version, namely Prolog predicates; the separate-and-conquer approach has been quite successful in learning various restricted sublanguages of Prolog [Cohen, 1992a; Quinlan, 1990; Pazzani and Kibler, 1992]. Rule sets are also representationally more powerful than competing representations such as decision trees; this is reflected in the fact that rule induction systems significantly outper-

form standard decision tree induction systems on many problems [Pagallo and Hassler, 1990; Quinlan, 1987; Weiss and Indurkha, 1991]. Finally, many sorts of prior knowledge about a learning problem can be communicated to a rule induction system by providing appropriate constraints on the form of induced rules [Cohen, 1991; Cohen, 1992a].

The goal of this paper is to study the degree to which rule set induction methods scale up to large, real-world learning problems. In particular, we will study the asymptotic complexity of rule induction in the presence of two phenomena common in real-world datasets: large training set size and noise. In Sections 2 and 3, we show that existing methods do not scale up well, presenting evidence to this effect in the form of both experimental results and formal argument. In Section 4 we propose some solutions to these problems. These solutions are then evaluated in Section 5. We show that our pruning methods dramatically improve the asymptotic time complexity of rule induction with no apparent loss in accuracy.

2 Rule induction: does it scale up?

2.1 Noise-free rule induction

In this paper, we will use as our experimental testbed pFOIL, which is a propositional version of the rule induction system FOIL [Quinlan, 1990]. Briefly, pFOIL is a top-down, “separate-and-conquer” rule induction system; it builds a rule set greedily by adding one rule after another to an initially empty rule set until all positive examples are covered. Each rule in turn is built using another greedy strategy, starting with a maximally-general rule and repeatedly specializing it by adding a single condition until the rule covers no negative examples. The specialization process is based on information-gain heuristics.¹

On multi-class problems, pFOIL learns a set of rules for each class that separates the examples of that class

¹pFOIL is written in Quintus Prolog 3.1, and is actually implemented by using a propositional version of the Grendel learning system [Cohen, 1991] with a suitable antecedent description grammar. Propositional versions of these systems are used here to isolate the intrinsic costs of rule induction from the overhead costs associated with learning in first-order logic.

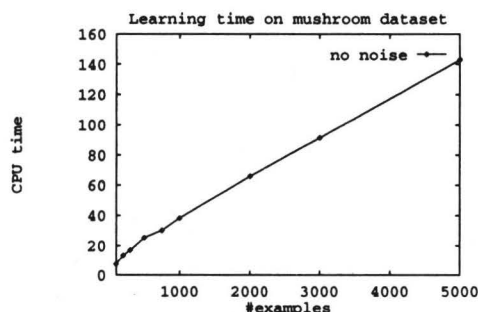


Figure 1: Rule induction without noise

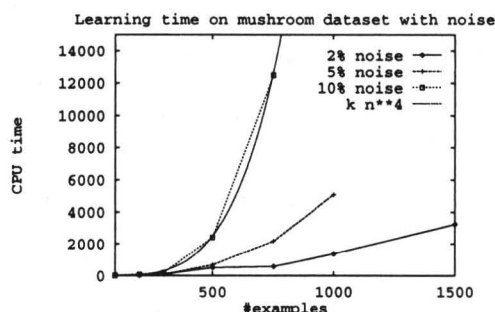


Figure 2: Rule induction with noise

from examples of all other classes. When classifying, conflicts between rules are currently resolved by choosing the classification suggested by the rule which is most accurate on the training data. This strategy is also followed on two-class problems: for example, on the *mushroom* problem described below, pFOIL learns one set of rules that recognize *edible* mushrooms, and one set that recognizes *poisonous* mushrooms, and resolves conflicts between these two rule sets at classification time.²

Figure 1 plots pFOIL's learning time (in CPU seconds on a Sparc 1+) versus the number of examples used on the *mushroom* dataset from the UC/Irvine Repository. Runtime increases from about seven seconds for 100 examples to a little more than two minutes for 5000 examples; the growth is very nearly linear for the entire range. This first graph suggests that pFOIL scales up extremely well as sample sizes become large.

2.2 Reduced error pruning and noisy data

This dataset, however, is unusual in that it is virtually noise-free.³ The situation changes radically if noise is added to the problem. To allow pFOIL to cope with noisy data, we added to pFOIL a variant of Brunk and Pazzani's *reduced error pruning* [1991], which was in turn inspired by Pagallo and Haussler's pruning algorithm for decision lists [1990] and earlier work in pruning decision trees [Quinlan, 1987].

The reduced error pruning algorithm consists of two phases, each of which requires an independent sample. (Practically speaking, this requires dividing the training data into two sets, a *primary training set* and a *retraining set*. In all the experiments of this paper, the primary training set is a random 70% and the retraining set a random 30% of the full training set.) In the first phase, which we call *fitting*, a rule set is found that has zero error on the primary training set. When noise is present this rule set tends to be overly complex: it "overfits"

the data. In the second phase, called *simplification*, a greedy strategy is used to simplify this rule set. In our implementation, two simplification operators are used: any single rule may be deleted from the rule set, or any final sequence of conditions⁴ may be deleted from a rule. The reduced error pruning strategy repeatedly applies the simplification operator yielding the hypothesis with lowest error on the retraining set; this produces a series of progressively simpler hypotheses, the error rates of which typically fall and then rise again in a U-shaped curve. The output of reduced error pruning is the hypothesis in this series that has the lowest error rate on the retraining set.

Figure 2 plots runtime versus sample size for pFOIL with reduced error pruning when 2%, 5%, and 10% classification noise is added to the *mushroom* data. The rate of growth is faster on the noisier datasets, and is always worse than linear. The curve for 10% noise, for example, seems to fit the curve $t = kn^4$ quite well.⁵ With 10% noise, pFOIL requires several hours to solve problems of relatively modest size.

We note that recent work has demonstrated that competing learning methods—in particular decision tree induction methods—scale quite well, even on noisy data; experiments have been performed in which tens or hundreds of thousands of examples were used for learning [Catlett, 1991]. Unfortunately, the rapid rate of growth shown in Figure 2 makes it impractical to use rule induction methods on large noisy datasets.

2.3 Alternative pruning methods

In this paper, we will use the implementation of reduced error pruning described above as our "strawman" noise-correction method; this choice requires, perhaps, some justification. An alternative to the fit-and-simplify pruning approach exemplified by reduced error pruning is to employ some sort of a *stopping rule* to keep the rule learner from overfitting the data; for example, FOIL uses an MDL-based stopping rule [Quinlan, 1990] and CN2

²The strategy of finding rule sets for each class and resolving conflicts when classifying is also used in the HYDRA system [Ali and Pazzani, 1993].

³This can seem most easily by observing that pFOIL converges to a hypothesis that is more than 99.95% accurate, as measured by crossvalidation on the unseen portion of the dataset.

⁴For example, the rule "if w and x and y and z then class=a" might be simplified to either "if w and x and y then class=a" or "if w and x then class=a" or "if w then class=a".

⁵This behavior is predicted by the analysis in Section 3.

[Clark and Niblett, 1989] uses a statistical test. However, comparative studies have shown such stopping rules to be generally inferior in the closely related problem of decision tree induction [Quinlan, 1987]; the available evidence indicates that this also holds for rule set induction [Brunk and Pazzani, 1991].

There are also many variants of reduced error pruning; for example, Brunk and Pazzani [1991] and Pagallo and Haussler [1990] both use slightly different sets of simplification operators, and both choose to stop simplifying when no single simplification produces a more accurate rule set (rather than generating an entire series of rule sets and then choosing the most accurate in the series, as we do.) A more radical variation is proposed by Weiss and Indurkha, who use a CART-like cross validation scheme to choose simplifications rather than a single retraining set.

While such refinements almost certainly do have an effect on accuracy, the analysis of the next section suggests that the time complexity of reduced error pruning is *not* very sensitive to the details of its implementation: in fact, the rapid growth of Figure 2 probably occurs for any fit-and-simplify greedy pruning method. In addition, experimental results with other systems confirm that they are also computationally expensive.

3 Understanding the problem

3.1 Complexity analysis

A complexity analysis of reduced error pruning reveals the reason for this rapid growth. In the analysis below, n denotes the number of training examples, c denotes the number of conditions in the rule set output by the fitting phase of reduced error pruning, r denotes the number of rules output in the fitting phase, d denotes the number of conditions in the rule set output by the simplify phase of reduced error pruning, and s denotes the number of rules output in the simplification phase. Also, $\text{EVAL}(c, n)$ denotes the cost of evaluating the accuracy of a rule set with c conditions on a dataset of n examples.⁶ Finally, we will assume two classes, equally represented in the training set.

With top-down separate-and-conquer rule induction systems such as pFOIL, before a condition is added to the rule set, the value of adding that condition is tested against the primary training set: in pFOIL, for example, the “information gain” of the condition relative to the data is computed. The cost of testing each condition is thus proportional to the amount of relevant primary training data. A crucial point to note is that the relevant training data includes *all* examples that the rule should *not* cover: under the assumptions above, there will be $0.7n$ examples in the primary data set, and at

⁶In the analysis below we will assume that this is linear in both c and n , as is the case in our implementation. It is useful to keep it separate, however, because, in some special cases—notably when rules for only a single class are learned—caching techniques can be used to reduce evaluation cost. It is also possible that subsampling techniques [Catlett, 1991] could be used to estimate coverage, also reducing evaluation cost.

least half of these, or $0.35n$ examples, will be examined in adding each condition. We thus conclude that the time complexity for the fitting phase⁷ is

$$\text{Time}(\text{fit}(c, n)) \geq c \cdot 0.35n = \Omega(cn) \quad (1)$$

Recall that the notation $g(x) = \Omega(f(x))$ means that g grows at least as fast as f asymptotically.

The simplification phase can be analyzed in a similar way. The outer loop, in which a single simplification is chosen, will be repeated r times in the best case. To choose a simplification our algorithm must generate e different possible simplifications, where e is the size of the last rule set (as a rule with k conditions can be simplified in $k - 1$ ways, or simply deleted), and evaluate these alternative simplifications against the retraining set. Since all of the retraining set is used in each evaluation, and on the first $r/2$ iterations the size e of the current rule set is greater than $c/2$, we see that

$$\begin{aligned} \text{Time}(\text{simplify}(r, c, n)) \\ \geq \frac{r}{2} \cdot \frac{c}{2} \cdot \text{EVAL}\left(\frac{c}{2}, 0.3n\right) = \Omega(rc\text{EVAL}(c, n)) \end{aligned} \quad (2)$$

3.2 Random data is $\Omega(n^4)$

As the experiments of Figure 2 suggest that datasets with a high rate of noise are problematic, we consider a limiting case of this: datasets which are purely random noise, with no underlying pattern whatever. Since pure noise is incompressible, the rule set output by *fit* must contain around n rules, each of which covers only a single example. If we also assume that all attributes are binary, then each rule must have $\log n$ conditions to distinguish the single example that it covers from the other n examples. Thus c is roughly $n \log n$; substituting this into Equation 1 we obtain

$$\text{Time}(\text{fitRand}(n)) = \Omega(cn) = \Omega(n^2 \log n)$$

Substituting these values into Equation 2 we obtain

$$\begin{aligned} \text{Time}(\text{simplifyRand}(n)) \\ = \Omega(n^2 \log n \cdot \text{EVAL}(n \log n, n)) \end{aligned}$$

If we assume that each of the $r \approx n$ rules in the rule sets must be tested against the data, then evaluation cost is at least $rn \approx n^2$; thus for purely random data

$$\text{Time}(\text{simplifyRand}(n)) = \Omega(n^4 \log n)$$

We draw the following conclusions from this analysis.

The growth rate is unacceptably high. While the growth rate is polynomial, it is unacceptably high for an algorithm which will be used for large n .

This problem is pervasive. At first glance, it may seem that purely random incompressible data is a poor model for real-world data; however, reflection shows that this is not the case. In any data set containing a constant fraction of noisy examples, a constant fraction of the data will appear to be random incompressible noise; for

⁷This argument holds for induction methods that learn DNF concepts using a separate-and-conquer procedure; a similar argument, however, can be made for methods that learn decision lists.

instance, in the *mushroom* data with 5% noise added, one twentieth of the data looks like random incompressible noise. Thus almost any noisy dataset should show the same behavior in the limit; a data set that is only 5% noise would simply require twenty times the number of examples for the n^4 growth rate to be observed.

The problem is not sensitive to the details of the implementation of reduced error pruning. It might be argued that our implementation does somewhat more work than is strictly necessary, and that a smaller set of simplification operations (for example) might improve matters. However, let us consider a "fast" version of reduced error pruning which only permits entire rules to be deleted, and which stops pruning as soon as no simplification improves the error rate. Letting s denote the number of rules output by this simplifier, for random data, the time complexity is still

$$\begin{aligned} \text{Time}(\text{simplifyRand1}(n)) \\ = \Omega((r-s)n \cdot \text{EVAL}(n \log n, n)) = \Omega((r-s)n^3) \end{aligned}$$

Thus asymptotic time complexity is only better if $r-s \ll n$; in other words, performance is only improved if most of the rules which should be deleted are retained by the simplifier!

4 Improving asymptotic cost

4.1 An alternative pruning algorithm

The results indicate that a substantially different simplification procedure is needed; they also suggest that $O(n^2)$ is about the right amount of computational effort to expend, as faster techniques would simply lead to a learning system whose run time is dominated by the initial fitting phase. We have implemented such a procedure, which we call *reduced error rule set re-growth*.

The procedure is based on a technique used in the Grove learning system [Pagallo and Hassler, 1990]. As before, the first phase is to find a rule set R_0 that overfits the primary training data. A greedy procedure is then used which starts with an empty rule set and repeatedly "grows" the rule set in the manner that reduces error the most on the retraining set; this procedure stops when no *growth operator* reduces error. Pagallo and Haussler used a single growth operator, namely to add a single rule from R_0 to the new rule set.

Pagallo and Haussler's method recovers well from unnecessary rules, but behaves poorly when all of the rules learned in the *fit* phase contain extraneous conditions. After some experimentation, we observed that substantially better results could be obtained with the following variant of the Pagallo and Haussler procedure, which we will call *Grow*. First, a rule set R_0 is found by overfitting the primary data set, as before. Next, each rule $r_i \in R_0$ is taken, and repeatedly simplified (using the rule simplification operator used in our implementation of reduced error pruning) in the way that either decreases its error on the primary training set the most, or, more usually, that increases its error on the primary training set the least. The result of this is a series of generalizations $r_{i,1}, \dots, r_{i,k_i}$ of the original rule r_i . All of the

generalizations in this series are then added to the rule set R_0 .

After the initial rule set R_0 has been thus expanded, we simply apply the same greedy procedure used before: starting with an empty rule set, the rule from $r_{i,j} \in R_0$ is added which reduces error the most on the retraining set. Ties (which are not infrequent) are broken by choosing the rule that had the lowest error rate on the primary training data; if this also leads to a tie, then the smaller rule is chosen.

It can be easily shown that the time complexity of this algorithm is

$$\begin{aligned} \text{Time}(\text{grow}(r, c, n)) \\ \leq (c + c\text{EVAL}(s, n)) = O(c\text{EVAL}(s, n)) \end{aligned}$$

where the first sum of c is the time to generalize the initial set of rules R_0 . For random data, $c \approx n \log n$, and the algorithm should generate only a small set of rules; i.e. s should be of constant size. The time complexity on random data is thus bounded by

$$\text{Time}(\text{growRand}(n)) = O(n^2 \log n)$$

Notice that this is asymptotically no worse than the time complexity of fitting the data.

4.2 Decreasing the cost of overfitting

The results also show that no fit-and-simplify method can do better than $n^2 \log n$, since the initial stage of overfitting can require $n^2 \log n$ time. Thus, we have also investigated using *stopping rules* to prevent overfitting. Since previous research indicates that stopping rules are usually not competitive with the fit-and-simplify approach, our stopping rules are intended to be used in combination with simplification methods like *Grow*. In short, the goal of the stopping conditions is not to prevent overfitting entirely, but simply to reduce the amount of overfitting to more manageable levels.

We have implemented two stopping heuristics. The *rule rejection heuristic* examines the last rule added to a rule set, and decides whether or not to reject that rule; if the rule is rejected, then it is deleted from the rule set, and no further rules are added. Analogously, the *rule specialization rejection heuristic* examines a proposed specialization of a rule being constructed, and decides whether or not to reject the specialization; if a specialization is rejected, the learner backs up to the unspecialized version of the rule, and attempts to add it to the current rule set.

Both of our heuristics are based on minimum description length principles, and require no additional training data. The basic idea in both cases is to compare the description length of the current rule set with an estimate of the description length of the rule set that would result by carrying through the learning process to the bitter end; for example, the rule rejection heuristic compares the description length of the current rule set with an estimate of the description length of the rule set resulting from adding enough additional rules to cover all of the remaining examples, and rejects a rule when this estimate is much larger than the current description length. Our intention was that this very conservative stopping

Benchmark Set 1	Classes	Attributes		Examples
		Discr	Cont	
audiology	20	60	0	226
iris	3	0	4	150
labor	2	8	8	57
soybean	4	35	0	47
splice	3	60	0	3190
thyroid-dis	2	23	6	3772
vote	2	16	0	435

Benchmark Set 2	Classes	Attributes		Examples
		Discr	Cont	
bridge	2	7	0	106
kr-vs-knn	2	16	0	1000
mushroom	2	22	0	8124
rds	2	0	30	2500
sonar	2	0	60	208
segment	7	0	19	2310
thyroid-hypo	2	18	7	3163
thyroid-allbp	3	23	6	3772

Table 1: Domains used in testing

criterion would improve runtime performance without adversely impacting generalization performance.

Space limitations preclude a detailed description of these heuristics. The interested reader is referred to the expanded version of this paper [Cohen, 1992b].

5 Experimental Results

To summarize, we have argued that reduced error pruning is expensive for large, noisy datasets, and proposed two alternative techniques: a simplification algorithm that has a lower asymptotic complexity on noisy data, and an MDL-based prepruning strategy which reduces overfitting. Unfortunately, while the time complexity of the proposed simplification algorithms has been analyzed, it is quite difficult to analyze their behavior as learning algorithms: i.e., how well the hypotheses they produce generalize the data. We thus used experimental methods to compare the performance of the proposed algorithms. We have also experimentally tested the main predictions of the time complexity analysis.

5.1 Methodology

We assembled a set of benchmark datasets from the propositional classification-learning problems available in the UC/Irvine Repository as follows. We randomly selected seven datasets to be used for preliminary testing, and seven to be used as a prospective test. One additional real-world dataset, which came to our notice in the final stages of testing, was added to the second group.⁸ We used the first group of datasets to fine-tune the Grow algorithm and the MDL pruning method; for example, the tie-breaking rules used by Grow were added after examining these datasets. However, the second group of datasets were not examined during algorithm development; i.e., *all algorithms were fixed before experimentation with the second group of datasets*. Thus performance on the second group can be regarded as a purely prospective test of the algorithms. The benchmark datasets are summarized in Table 1.

Our procedure for measuring error rates was also fixed before any experiments were performed: we pooled all

⁸This problem, which is labeled *rds* in the table, is to predict if a particular piece of switching hardware is about to enter a failure mode from various pieces of performance data. The performance data is maintained for accounting purposes and is not very good at predicting failure; thus the dataset appears quite noisy.

examples and used 10-fold cross-validation [Weiss and Kulkowski, 1990] to measure accuracy. The size of the partition used for training was 90% of the total number of examples, or 500 examples, whichever was smaller; this restriction was made to prevent experimentation with reduced error pruning from being overly expensive.

Many of these datasets contained missing or continuous attributes, which pFOIL cannot handle unaided. Continuous attributes were discretized into 20 equal-frequency partitions. Missing continuous attributes were replaced with the average value for that attribute; missing nominal attributes were replaced with the most frequently occurring value.⁹

5.2 Comparing error rates

These results are summarized in Table 2; here No Pruning represents using no pruning method, REP represents reduced error pruning, Grow represents our simplification algorithm, and MDLGrow is Grow with our prepruning algorithm. Standard errors are also given; however, due to space limitations we give only summary figures for the non-prospective tests (Benchmark Set 1). The problems are arranged in order of increasing difficulty, as measured by the CPU time required by reduced error pruning (see Table 3), and we have highlighted the most important figures in the table: the average error rates of the three pruning algorithms on the prospective test. The figures indicate that Grow and MDLGrow are (at the very least) no less accurate on average than reduced error pruning. In fact, the trend is for Grow and MDLGrow to outperform reduced error pruning, although this difference is almost never statistically significant for any single benchmark.¹⁰

In performing the experiments, a few hitches arose with our proposed methodology. In two of the datasets, *mushroom* and *kr-vs-knn*, there was no noise and virtually no difference among the pruning methods. Thus we also considered versions of these problems (*mushroom** and *kr-vs-knn**) in which 10% random classification

⁹An exception is the *audiology* dataset, which contained many attributes that were always either missing or true. For this dataset missing attributes were replaced with a special marker value. Another exception was the *sonar* dataset; which was discretized into only ten partitions to avoid memory limitations.

¹⁰Notice also that on some datasets, every pruning method leads to a higher error rate. This may be due to noise-free data or to sparse data [Schaffer, 1992].

Benchmark	Error rate							
	No Pruning		REP		Grow		MDLGrow	
kr-vs-kkn	0.1	± 0.03	0.1	± 0.03	0.1	± 0.03	0.1	± 0.03
bridge-t/d	15.3	2.7	19.6	3.5	18.5	2.5	17.3	2.5
thyroid-hypo	2.3	0.1	1.6	0.1	1.5	0.2	1.5	0.1
bridge-mtrl	22.2	5.2	15.3	6.2	13.1	4.3	14.7	4.7
mushroom	0.6	0.1	1.3	0.3	1.5	0.2	1.5	0.2
thyroid-allbp	4.8	0.2	4.1	0.2	4.2	0.2	4.2	0.2
bridge-span	22.1	5.8	36.1	8.0	37.8	7.7	36.1	8.0
bridge-rel-l	34.7	4.4	31.8	2.9	29.2	2.2	28.4	1.7
bridge-type	46.2	3.7	47.4	5.6	42.6	5.7	44.2	5.1
sonar	26.5	2.6	26.5	1.9	25.8	2.7	25.8	2.7
segment	9.6	0.4	11.9	0.8	10.8	0.6	10.8	0.6
mushroom*	8.2	0.7	3.6	0.7	2.8	0.3	2.9	0.3
kr-vs-kkn*	4.7	0.4	1.4	0.3	0.7	0.3	0.4	0.2
rds	30.3	0.4	29.1	0.7	29.0	0.5	24.8	0.4
Average for Benchmark Set 2	17.06		16.43		15.47		15.19	
Average for Benchmark Set 1	9.47		12.07		11.16		11.73	

Table 2: Comparing error rates

noise was added to the training data. Also, on closer examination, the **bridge** dataset turned out to contain five different classification problems, as it contained five different dependent attributes which needed to be predicted. We include results for all of the five **bridge** problems. This perhaps weights the average results somewhat too heavily to pruning methods that do well on this dataset; however, if the five **bridge** problems are weighted as a single problem, the results are qualitatively the same. The results are also qualitatively the same if the **mushroom*** and **kr-vs-knn*** benchmarks, which contain artificial noise, are omitted.¹¹

5.3 Comparing time complexity

Table 3 shows the corresponding results for CPU time. To summarize, Grow and REP are comparable for benchmarks that are either small in size or free of noise; similarly, MDLGrow is comparable to Grow on smaller problems. On larger problems, however, Grow is much faster than reduced error pruning, and MDLGrow is faster still; many of these differences are highly statistically significant. On average, MDLGrow is more than ten times faster in the prospective test.

We also undertook somewhat more detailed studies of CPU time performance on selected benchmarks. Figure 3 shows the results for the **rds** dataset, which is typical (similar results for three other benchmarks are given in the expanded version of this paper [Cohen, 1992b].) These results serve as additional confirmation of the main claim of the paper: that the runtime of Grow and MDLGrow is asymptotically faster than reduced error pruning.

¹¹Weighting the **bridge** problems as one, the average error rate is 10.97% for reduced error pruning, 10.37% for Grow, and 10.02% for MDLGrow. If one also discounts the artificial problems, the average error rate is 13.09% for reduced error pruning, 12.52% for Grow, and 12.11% for Grow with MDL pruning.

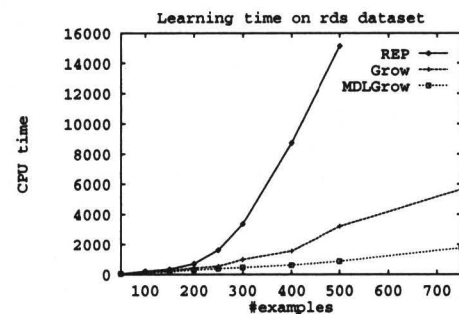


Figure 3: CPU time comparison on **rds** dataset

6 Concluding Remarks

In this paper, we have studied the ability of rule set induction methods to handle learning problems with many examples in the presence of noise. It was demonstrated that the best currently known method, reduced error pruning, requires large amounts of time to handle large datasets: asymptotically, the complexity of the method grows as n^4 for noisy datasets of n examples. Two solutions to this problem were proposed. First, an alternative pruning method that requires only time proportional to $n^2 \log n$ was described. In spite of its asymptotically faster performance, this method finds hypotheses that are at least as accurate as those found by reduced error pruning; in fact, it outperforms reduced error pruning on seventeen of twenty-one benchmark problems. The second technique for dealing with the high cost of pruning was a prepruning method based on MDL principles; this technique was also shown to reduce runtime without leading to any degradation in classification accuracy.

The techniques described in this paper appear to extend easily to relational learning problems; however, this

Benchmark	CPU Time							
	No Pruning		REP		Grow		MDLGrow	
kr-vs-kkn	10.8	± 0.6	18.5	±1.8	13.2	±0.6	13.4	±0.6
bridge-t/d	12.7	0.9	27.6	3.3	10.4	0.9	8.1	0.7
thyroid-hypo	72.6	6.5	56.6	9.4	46.4	6.2	48.1	6.3
bridge-mtrl	22.1	0.6	76.7	9.6	16.5	1.5	10.6	0.6
mushroom	35.6	0.8	78.3	7.8	44.5	1.4	45.3	1.7
thyroid-allbp	144.8	7.7	164.5	12.6	99.5	4.6	100.7	5.8
bridge-span	29.5	0.8	176.2	18.6	31.9	2.3	13.3	0.8
bridge-rel-l	44.1	1.0	294.1	36.9	34.0	2.9	14.1	1.2
bridge-type	38.9	1.1	370.6	25.2	40.5	2.3	21.2	1.0
sonar	561.0	12.9	399.2	15.1	368.2	12.0	370.6	12.1
segment	815.7	23.9	1264.0	86.6	728.2	29.6	733.6	27.8
mushroom*	217.2	10.1	4081.7	485.4	276.7	23.4	135.1	6.9
kr-vs-kkn*	154.2	11.9	5549.3	1255.3	206.6	23.5	53.5	4.0
rds	3189.1	84.9	15155.2	1282.4	2210.0	52.0	879.9	42.4
Average for Benchmark Set 2	382.03		2695.63		402.00		239.38	
Average for Benchmark Set 1	108.4		384.0		105.9		100.5	

Table 3: Comparing runtimes

still needs to be verified experimentally. (The MDL based prepruning, for example, may need modification to work properly on relational problems.) Also, while the techniques described here have natural extensions which can be applied in learning from examples and a grammatical bias [Cohen, 1992a], these extensions have again not been experimented with systematically.

Acknowledgments

Many thanks to Jason Catlett, Haym Hirsh, and Mike Pazzani for comments on an early draft of this paper, to Susan Cohen for proofreading it, and to Wan-Ping Chiang for providing the rds data.

References

- [Ali and Pazzani, 1993] Kamal Ali and Michael Pazzani. HYDRA: A noise-tolerant relational concept learning algorithm. In *Proceedings of the 13th International Joint Conference on Artificial Intelligence*, Chambery, France, 1993.
- [Brunk and Pazzani, 1991] Clifford Brunk and Michael Pazzani. Noise-tolerant relational concept learning algorithms. In *Proceedings of the Eighth International Workshop on Machine Learning*, Ithaca, New York, 1991. Morgan Kaufmann.
- [Catlett, 1991] Jason Catlett. Megainduction: a test flight. In *Proceedings of the Eighth International Workshop on Machine Learning*, Ithaca, New York, 1991. Morgan Kaufmann.
- [Clark and Niblett, 1989] P. Clark and T. Niblett. The CN2 induction algorithm. *Machine Learning*, 3(1), 1989.
- [Cohen, 1991] William W. Cohen. Grammatically biased learning: learning Horn theories using an explicit antecedent description language. AT&T Bell Labs Technical Memorandum. Available from the author on request, 1991.
- [Cohen, 1992a] William W. Cohen. Compiling knowledge into an explicit bias. In *Proceedings of the Ninth International Conference on Machine Learning*, Aberdeen, Scotland, 1992. Morgan Kaufmann.
- [Cohen, 1992b] William W. Cohen. Efficient pruning methods for separate-and-conquer rule learning systems. AT&T Bell Labs Technical Memorandum. Available from the author on request, 1992.
- [Pagallo and Hassler, 1990] Giulia Pagallo and David Hassler. Boolean feature discovery in empirical learning. *Machine Learning*, 5(1), 1990.
- [Pazzani and Kibler, 1992] Michael Pazzani and Dennis Kibler. The utility of knowledge in inductive learning. *Machine Learning*, 9(1), 1992.
- [Quinlan, 1987] J. Ross Quinlan. Simplifying decision trees. *International Journal of Man-Machine Studies*, 27:221-234, 1987.
- [Quinlan, 1990] J. Ross Quinlan. Learning logical definitions from relations. *Machine Learning*, 5(3), 1990.
- [Schaffer, 1992] Cullen Schaffer. Spare data and the effect of overfitting avoidance in decision tree induction. In *Proceedings of the Tenth National Conference on Artificial Intelligence*, San Jose, California, 1992. MIT Press.
- [Weiss and Indurkha, 1991] Sholom Weiss and Nitin Indurkha. Reduced complexity rule induction. In *Proceedings of the 12th International Joint Conference on Artificial Intelligence*, Sydney, Australia, 1991. Morgan Kaufmann.
- [Weiss and Kulkowski, 1990] Sholom Weiss and Casmir Kulkowski. *Computer Systems that Learn*. Morgan Kaufmann, 1990.