

Structural Inferences from Massive Datasets

Kenneth Yip
MIT AI Lab
Cambridge, MA 02139
U.S.A.

Abstract

High-level understanding of data must involve the interplay between substantial prior knowledge with geometric and statistical techniques. Our approach emphasizes the recovery of basic structural elements and their interaction patterns in order to summarize and draw inferences about the significant features contained in the data. As a testbed for modeling how scientists analyze and extract knowledge of structure morphogenesis from data, we examine the datasets obtained from numerical simulation of turbulence. We describe a program that automatically extracts 3D structures, classifies them geometrically, and analyzes their spatial and temporal coherence. Our program is constructed by mixing and matching the aggregate, classify, and re-describe operators of the spatial aggregation language. The research is a continuation of the effort to investigate the role of imagistic reasoning in human thinking.

1 Introduction

An essential survival skill for humans is the ability to perceive objects, classify them, and predict their behavior. Much of the neural machinery is devoted to these tasks. We believe that the machinery that forms the foundation of intelligence is to be found in the mechanisms that support, for example, the vision, the language, and the sensorimotor faculties. Each faculty has to solve the figure-ground problem: To identify, interpret, manipulate, and track salient objects.

It is important to understand how each such modality contributes to overall intelligence. Each modality draws on proprietary representations and problem-solving competences. Each takes inputs from internal sources as well as from the outside world. For example, a linguistically represented problem can require us to harness the power of our visual system so as to engage the strategies of "imagistic reasoning" or visual imagination. What appears to be a high-level cognitive ability emerges from cooperative problem-solving as peripherals work out parts

of a problem that have been reexpressed in terms of peripheral-specific representations.

If humans do have and make use of these peripheral representations, what is the form of these representations? What are the processes that manipulate them?

In this paper we focus on the development and new applications of imagistic reasoning. In particular, we propose a model to reason about spatially distributed, temporally evolving 3D structures in the domain of fluid dynamics. Our model aims to capture the process by which human scientists interpret numerical simulation data. Our approach follows the spatial aggregation framework [Yip and Zhao, 1996]: Programs are implemented by mixing and matching a few high-level operators such as aggregate, classify, and re-describe. We report on our progress in implementing the performance model.

The research is inspired by the practical needs for analyzing large amount of data and the intellectual curiosity to understand how humans discover regularities, summarize significant events, and debug conceptual models. We use scientific datasets as a testbed in order to exploit the vast amount of accumulated specialized knowledge. Scientists' reasoning about fluid dynamical objects rely on the same intuitive concepts of objects: cohesiveness and continuity [Spelke *et al.*, 1995]. An object is cohesive if it is internally connected, externally bounded, and moves while maintaining its connectedness and boundedness. The motion of an object is not arbitrary; it traces one connected path in space-time and leaves no gaps.

Describing complex fluid phenomena in terms of such intuitive notions of cohesive objects¹ and their interaction patterns is useful for qualitative understanding and almost necessary for developing new conceptual models of dynamical mechanisms.

2 Human understanding

The entire theory of incompressible fluid flow is contained in the Navier-Stokes equations. However, progress in analyzing the equations analytically has been slow. Much of the understanding of flow mechanisms comes from an interplay between numerical simulation

¹The term "coherent objects" is more commonly used in the turbulence research community.

and experimental data. To see an example of this kind of understanding that fluid dynamicists arrive at after detailed investigation of simulation data, let us quote a passage in the concluding section of [Robinson, 1991]:

The main conclusion is that the self-maintaining cycle of turbulence production in the boundary layer is driven by the formation or regeneration of embedded vortical structures... A mature vortical arch gives rise to a trailing quasi-streamwise vortex... The quasi-streamwise vortex elements collect and lift low-speed near-wall fluid, leaving behind a persistent low-speed streak. Relatively high-speed fluid scrubbing the vortex-lifted low-speed fluid creates a shear layer which rolls up into a new vortical arch. The new arch grows outward by agglomeration and/or self-induction and circulation lift, and the cycle repeat itself.

See the diagram in Figure 1 accompanying the explanation.

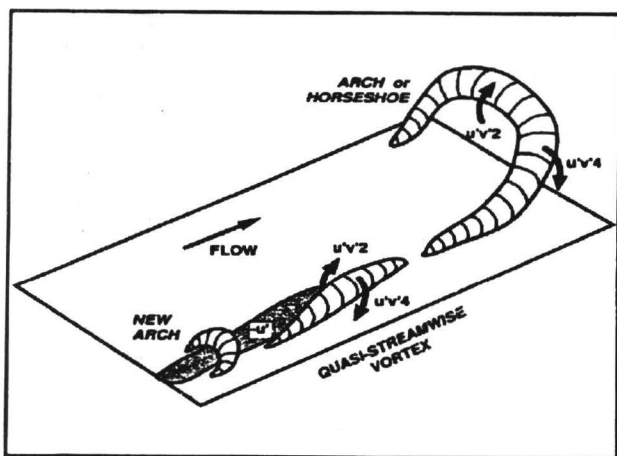


Figure 1: A conceptual model summarizing the morphogenesis of vortex structures near a turbulent boundary layer.

Much can be learned from this explanation. First, the explanation is conceptual: it does not provide any new equations. Second, the explanation refers to various kinds of structures: vortices², streaks, and shear layer. Third, the spatial character (e.g., arch-shaped, stream-wise, persistent) of the structures are described and related. And finally the dynamical process is described in terms of structural morphogenesis: the growth and agglomeration of structures and their effect on others (e.g., lifting, rolling up).

²Vortex is an intuitive notion denoting some compact region of swirling fluid motion; it is related to but not the same as the vector quantity vorticity, the curl of the velocity, at a flow field point.

3 The Spatial Aggregation Framework

In recent years, a computational framework, *spatial aggregation*, has been developed to unify the description of a class of imagistic problem solvers. A program written in this framework has the following properties. It takes a continuous field and optional objective functions as input, and produces high-level descriptions of structure, behavior, or control actions. It computes a multi-layer of intermediate representations, called spatial aggregates, by forming equivalence classes and adjacency relations. It employs a small set of generic operators such as aggregation, classification, and localization to perform bidirectional mapping between the information-rich field and successively more abstract spatial aggregates. It uses a data structure, the neighborhood graph, as a common interface to modularize computations.

Our performance model is implemented in this style. In the following, we abstract away the details of the programming issues and focus on the incorporation of new aggregators and classifiers for manipulating 3D structures.

4 Performance Model

4.1 Objective and Strategies

The objective of the performance model is:

Given a sampled flow-field, construct a conceptual model to summarize the significant events implicit in the numerical data.

Numerical simulation of turbulent flow generates massive amount of data. Even a modest sampled flow-field consists of tens of gigabytes of data describing quantities such velocity, pressure, and vorticity at each sampled point. From observing how some scientists work, we propose a 5-step strategy to summarize data:

1. Isolate and characterize interesting structures.
2. Determine the spatial relationships among structures.
3. Track the morphogenesis of structures backward and forward in time.
4. Describe the statistical and dynamical significance of each structural event.
5. Note correlations among structural events and assign cause-and-effect relationships.

Not all of these steps have been automated. In the following we describe the pieces that have been implemented.

4.2 Aggregating field points

Many categories of structures can be defined as the isosurface of a scalar field. An isosurface of a scalar field F is defined as the set of points (x,y,z) such that $F(x,y,z) = c$ where c is a constant and is often called the threshold of the isosurface. Some examples are the low pressure region, the high-speed streak, and the eigenvalues of the velocity gradient.

A popular method to render isosurface is the marching cube algorithm [Lorensen and Cline, 1987]. The algorithm divides the field into little cubes. The intersection of the surface with the cube is determined by a table-lookup based on the signs of the values $F(x,y,z) - c$.³ The algorithm is reasonably fast, but does not guarantee a topologically consistent surface when adjacent cubes share a face where the vertices on the two diagonals differ in sign.

Our aggregator extends the basic marching cube algorithm in four ways:

- *Recursive subdivision.* The aggregator recursively subdivides an ambiguous cube into 8 little cubes until the newly generated cubes are unambiguous. The subdivision method gives accurate results subject to the limit in sampling resolution. The values at the sub-sampled points are determined by polynomial interpolation using values from adjacent cubes.
- *Multiple isosurfaces.* It requires little overhead to compute surfaces corresponding to different thresholds during a single march over the entire flow field.
- *Connected components.* The connectivity of a surface patch intersecting a cube are precomputed and stored in each cube pattern. The global connected components of the surface are determined by aggregating individual patches.
- *Volume estimate.* The volume enclosed by an isosurface is computed from the contributions from all the cubes on and inside the surface. Each cube pattern is pre-partitioned into tetrahedra representing the volume enclosed by a surface patch.

Other structures are defined by integral curves of a vector field. For example, a vortex line, the integral curve of the instantaneous vorticity field, is the basic building block of a vortex structure. However, it is important to distinguish vorticity lines (lines everywhere parallel to the vorticity vector) and vortices (regions of nearly circular motions in the plane normal to the core of the vortex observed at the core speed). In particular, vortices are much more cohesive and less noisy than vorticity lines. We adopt the following working definition for vortices:

Definition A *coherent vortex* is a compact bundle of adjacent, high-intensity vortex lines that are geometrically similar.

Aggregating vortex lines to form coherent structures is not straightforward. Previous researchers [Moin and Kim, 1985; Robinson, 1991] have found that vortex lines are sensitive to initial conditions. Nearby vortex lines can diverge rapidly. If the initial conditions are not chosen carefully, the resulting vortex lines are likely to resemble badly tangled spaghetti wandering over the whole

flow field, making the identification of organized structure extremely difficult. This might explain why vortex lines have not been widely used for structure identification.

Our search algorithm for vortices is adaptive[Yip, 1995]: it exploits local geometry (e.g., converging or diverging) of the vorticity lines to decide the direction and step size of integration.

4.3 Object Cohesiveness

There is a degree of arbitrariness in defining structures in terms of isosurfaces. The shape of the object depends on the threshold chosen, but it is often unclear how to set the appropriate thresholds. For example, what is the threshold for a low pressure region? Intuitively we prefer structures that are stable against small changes in the threshold. We compute a range of thresholds (the lower and upper bound of the thresholds are typically known) for each scalar field. Geometric properties of the re-described objects are plotted as functions of the thresholds. We choose the mean value in the largest threshold region in which the structures are stable as the desired threshold. Figure 2 shows an example of how cohesiveness of a vortex determines the choice of the threshold.

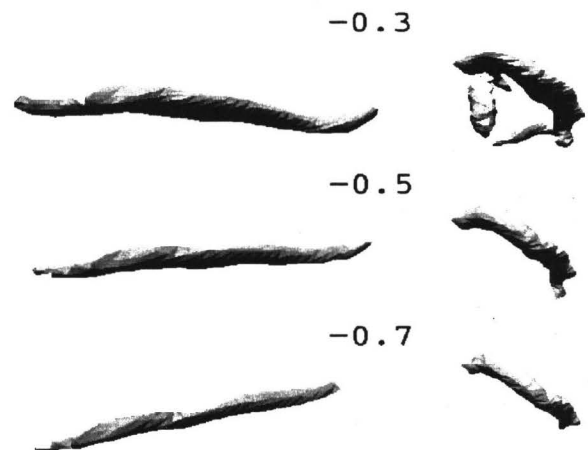


Figure 2: Cohesiveness of two vortices as a function of the isosurface threshold. Left: The shape of the vortex is stable in the range of threshold from -0.3 to -0.7. Right: The vortex is incohesive between -0.3 and -0.5.

To determine the stability of the shape of a collection of surface points for threshold selection, we find it sufficient to compute a gross geometric description of the points. The detailed shape representation is postponed until the surface classification stage (see next section). The algorithm is as follows. We compute a 3D bounding box that minimizes the thickness of the distribution of the points along the long axis of the box. The cloud of

³There are 2^8 ways a cube intersects a surface. The number can be reduced to 14 distinct configurations using rotation and reflection symmetries. In our implementation, we find it more convenient to use the entire table of 2^8 intersection patterns.

points is reoriented along the principal component directions. This reorientation is determined by rotating the points with the matrix of eigenvectors of the covariance matrix of the points. The reoriented points also serve as input to the detailed surface classification.

4.4 Classifying surfaces

The marching cube algorithm and the vortex line integration provide a surface representation of the fluid structures. To classify the structures, we need to recover their 3D geometry. We use generalized cylinders (GC) [Binford, 1990] as our basic shape model.

A generalized cylinder consists of a spline, a cross-section, and a sweeping rule. It is particularly useful for our problem because to a first approximation vortices are elongated slender structures which bend and turn.

Recovery of GC descriptions from images is a hard problem in computer vision because of noise and occlusion ([Zerroug and Nevatia, 1996]). Our problem is different and is much easier. We aim to recover the GC descriptions from 3D surface points. The recovery procedure has two stages: (1) recovery of the meridians of the GC, and (2) recovery of the cross sections and the spline of the GC.

The meridians of the GC are recovered as follows:

1. Reorient the surface points S along the principal component directions.
2. Project the points onto the plane normal to the first principal component direction, i.e., the eigenvector associated with the smallest magnitude. Call the projected points S_p .
3. Compute a delaunay triangulation of S_p .
4. Remove exterior triangles of the triangulation by a sculpturing method [Boissonat, 1984]. See Figure 3.
5. Extract an oriented boundary (anticlockwise) of the triangulation.
6. Segment the boundary at the two points corresponding to the two largest local maximum curvatures of the boundary. Call these two segments bd_1 and bd_2 .
7. Backproject bd_1 and bd_2 to obtain two meridians of the GC.

The surface points S are rotated along the last principal component direction. The above procedure is then repeated to obtain additional meridians of the GC.

The cross-sections and the spline of the GC are recovered as follows:

1. The meridians are smoothed and parametrized by an normalized arc length t from 0 to 1.
2. Align corresponding points of the meridians at fixed increments of t .
3. Fix an ellipse to these points to obtain the cross-section.
4. The center of the ellipses are smoothed to obtain the spline of the GC.

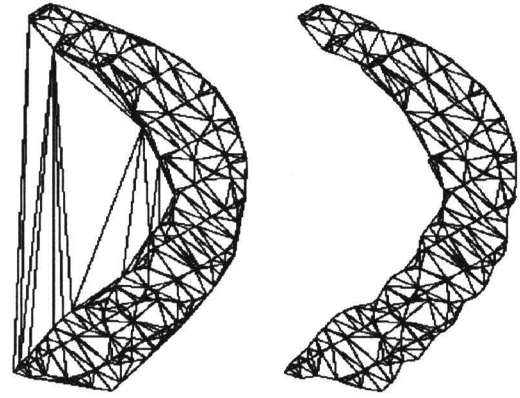


Figure 3: Sculpturing: Recover the shape of the 2D projection of a vortex by removing the exterior triangles from the delaunay triangulation. An exterior triangle is one whose circumcircle is much larger than the triangle (in terms of area). The meridians of the generalized cylinder representation of the vortex are found by backprojecting the boundary of the sculptured triangulation.

4.5 Re-describing Surfaces

A classified surface is a compact parametric description of a large number of field points. Like a lambda abstraction, the re-describe operator encapsulates the classified surface as a primitive object for further processing. For example, the center of mass, volume, orientation, and inertia tensor of the object are computed. From these quantities we estimate the distribution of characteristic objects (e.g, streamwise slender vortices) in interesting regions of the field (e.g., near the surface of a free surface flow).

4.6 Object Persistence

Structures typically persist over time. They evolve for a while and may grow or shrink or collide with other structures. Unlike structure recovery from 2D images, the analogous correspondence problem in recovery from 3D fields is much easier to solve. For example, we do not have to deal with occlusions.

Objects smoothly deform and move in connected paths. There is a lot of redundant information – size, shape, and relative positions – that carries over from one time slice to another. We track the largest structures (currently up to 20) and discard time slices which do not contain significant changes in the spatial character or distributions of the tracked structures. Conversely consecutive time slices that yield qualitatively different distributions are noted. These time slices are candidates for restart of numerical simulation to acquire better temporally resolved data.

4.7 Extensions

We have only automated the extraction of kinematics and statistics of a few turbulence structures (vortices and pressure regions). Much more remains to be done:

- More structures. Ejection zones, dissipation regions, high stress areas, pockets, large-scale motions – these are some of the more important structures that need to be tracked.
- Spatial correlations. We need to have efficient ways to compute pairwise or even triple correlations of spatial distributions.
- Dynamics. We need to incorporate qualitative rules of interaction to determine causal relations among structures. For example, a vortex accelerates velocity (lifts) on one side and slows down on another. A bent vortex exerts a self-induced motion along its binormal and the effect is proportional to the curvature of the bent [Arms and Hama, 1965].

5 Experiment

As a testbed, we choose a direct numerical simulation⁴ of free surface turbulence generated by a shear flow in a 128^3 rectangular box. The problem is important for several reasons. First, the mechanism for scalar transport into turbulent fluids across free-shear interfaces is important for the design and control of industrial equipments with free surfaces. Second, interest in environment and global warming raises the issue of how to accurately estimate mass transfer rate of CO_2 between atmosphere and ocean. Third, recent experiments have found evidence that low-speed streaks occur near free-slip surface under sufficient high shear. Visually these streaks resemble those found in wall-layer streaks. Without the complication of a solid boundary, studies in the formation of these streaks near free surface may shed additional light on the phenomenon.

It has been recently proposed that a definition of vortex in an incompressible flow in terms of the second eigenvalues of the symmetric tensor S^2 and Ω^2 where S and Ω are respectively the symmetric and antisymmetric parts of the velocity gradient tensor ∇u [Jeong and Hussain, 1995]. The symmetric part determines the contribution to local pressure minimum due to rotational motion alone.

This proposed definition is attractive computationally because it refers to the isosurfaces of a scalar field, the second eigenvalues of the symmetric tensor. We compare this definition with our working definition of vortex in terms of compact bundles of vorticity lines.

We have examined dozens of structures according to both definitions. We found a surprisingly good agreement between two definitions. Figure 4 is a typical result.⁵ The figure shows a superposition of the vortex lines recovered by laborious integration and the surface patches quickly recovered by the extended marching cube algorithm. Because of results like these, we now routinely use the scalar isosurfaces as surrogates for

vortices to develop our matching and correlation algorithms.

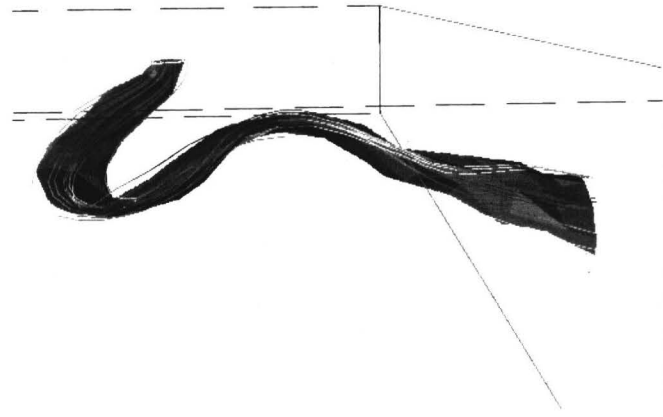


Figure 4: A superposition of vortex lines obtained by adaptive integration and the surface patches recovered by the marching cube algorithm. The agreement is surprisingly good.

6 Related Work

Our research shares some of the objectives with the visualization work in Rutgers [Silver and Zabusky, 1993]. The Rutgers group is interested in better interactive tools for helping scientists visualizing the datasets. In particular, they use ellipsoids to fit isosurfaces of vorticity, the modulus of the vorticity vector. Our effort emphasizes more on building a computational model of the process by which scientists understand those data. We ask questions about how scientists think visually and how this visual thinking is connected to the rather primitive knowledge of object cohesiveness, persistence, and continuity. We also use a more general shape model and explore the coincidence of different definitions of a coherent vortex.

Commonsense reasoning about fluids has been proposed as central problem in naive physics [Hayes, 1985]. The problem is hard because fluids do not conveniently divide into discrete pieces that can be easily combined. Collins and Forbus have partially implemented Pat Hayes' ideas for representing fluids using both the contained-liquid and piece-of-stuff ontologies [Collins and Forbus, 1987]. The work described here is closer to the scientific end of the formalization spectrum.

Our work builds on previous work by several groups on imagistic reasoning and spatial aggregation [Yip and Zhao, 1996]. Zhao [Zhao, 1994] extracts structures of trajectories from 3D phase space to guide control actions. Junker [Junker and Braunschweig, 1995] reconstructs the history of wavefront propagation from 2D seismic data.

⁴A direct simulation proceeds from the Navier-Stokes equations without extraneous modeling assumptions.

⁵We are exploring why there might be such a coincidence.

Nishida[Nishida *et al.*, 1991] automates the qualitative analysis of 3D phase space trajectories. Our work extends the frontier to tackle full 3+1D spatial-temporal field. Unlike previous work in domains where one has a rather complete knowledge of what the interesting structures are, we need to rely on informal concepts of object cohesiveness and coincidence for structure discovery.

7 Discussion/Conclusion

We have described a framework for understanding flow fields and progress in implementation. The specific technical contributions are threefold:

- We show how aggregation algorithms (based on marching cube and adaptive line tracing) and classification algorithms (based on recovery of generalized cylinders) can be used to extract and characterize interesting 3D fluid structures.
- In collaboration with the programs, we found a substantial agreement between a recently proposed definition for vortex and the more intuitive definition of vortex as compact bundles.
- We extend the library of spatial aggregation routines by incorporating new aggregators and new classifiers.

Many of these ideas are generally useful for the recovery of spatial-temporal patterns in other physical domains.

We believe the current work also sheds light on the nature of human intelligence. Even in sophisticated scientific applications, some scientists appear to think visually and rely on commonsense intuitions of object cohesiveness, persistence, and continuity – not unlike those shown in recent cognitive psychology literature. This shared core of knowledge attests to the importance of recycling the peripheral machinery (such as vision) for solving otherwise symbolically-posed problems. Traditional AI has searched for the secrets of central intelligence for years. Perhaps the central is the peripherals.

References

- [Arms and Hama, 1965] R. Arms and F.R. Hama. Localized-induction concept on a curved vortex and motion of an elliptic vortex ring. *Physics of Fluids*, 8, 1965.
- [Binford, 1990] T.O. Binford. Generalized cylinder representation. In *Encyclopedia of Artificial Intelligence*. Wiley, 1990.
- [Boissonat, 1984] Jean-Daniel Boissonat. Geometric structures for 3D shape representation. *ACM Transactions on Graphics*, 3(4), 1984.
- [Collins and Forbus, 1987] John Collins and Kenneth Forbus. Reasoning about fluids via molecular collections. In *Proceedings AAAI-87*, 1987.
- [Hayes, 1985] Patrick Hayes. The second naive physics manifesto. In J.R. Hobbs and R.C. Moore, editors, *Formal Theories of the Commonsense World*. Ablex Publishing Corp., 1985.
- [Jeong and Hussain, 1995] Jinhee Jeong and Fazle Hussain. On the identification of vortex. *Journal of Fluid Mechanics*, 285, 1995.
- [Junker and Braunschweig, 1995] U. Junker and B. Braunschweig. History-based interpretation of finite element simulations of seismic wave fields. In *Proceedings IJCAI-95*, 1995.
- [Lorensen and Cline, 1987] W.E. Lorensen and H.E. Cline. Marching cubes: A high resolution 3d surface construction algorithm. *Computer Graphics*, 21(4), 1987.
- [Moin and Kim, 1985] P. Moin and J. Kim. The structure of the vorticity field in turbulent channel flow. *Journal of Fluid Mechanics*, 155, 1985.
- [Nishida *et al.*, 1991] Toyoaki Nishida, Kenji Mizutani, Atsushi Kubota, and Shuji Doshita. Automated phase portrait analysis by integrating qualitative and quantitative analysis. In *Proceedings AAAI-91*, 1991.
- [Robinson, 1991] S.K. Robinson. The kinematics of turbulent boundary layer structure. Tech. Mem. 103859, NASA, 1991.
- [Silver and Zabusky, 1993] D. Silver and N. Zabusky. Quantifying visualizations for reduced modeling in nonlinear sciences: extracting structures from the datasets. *Journal of Visual Communication and Image Representation*, 4, 1993.
- [Spelke *et al.*, 1995] E. Spelke, Grant Gutheil, and Gretchen Van de Walle. The development of object perception. In *Visual Cognition*. MIT Press, 1995.
- [Yip and Zhao, 1996] Kenneth Yip and Feng Zhao. Spatial aggregation: Theory and application. *Journal of Artificial Intelligence Research*, 1996.
- [Yip, 1995] Kenneth Yip. Reasoning about fluid motion i: Finding structure. In *Proceedings IJCAI-95*, 1995.
- [Zerroug and Nevatia, 1996] M. Zerroug and R. Nevatia. Three-dimensional descriptions based on the analysis of the invariant and quasi-invariant properties of some curved-axis generalized cylinders. *IEEE Transactions on PAMI*, 18, 1996.
- [Zhao, 1994] Feng Zhao. Extracting and representing qualitative behaviors of complex systems in phase space. *Artificial Intelligence*, 69, 1994.